



Conductive Level Limit Switches

for Conductive, Water-Contaminating Liquids



measuring
•
monitoring
•
analysing



- Overfill protection for vessels with water-contaminating liquids (§ 19 WHG)
- Pressure: atmospheric pressure only
- Temperature: max. 60 °C
- Connection: G 1 or G 1½
- Electrode material: Stainless steel, Hastelloy, Titanium, Polyolefine or PTFE coated



N1

KOBOLD companies worldwide:

ARGENTINA, AUSTRIA, BELGIUM, CANADA, CHILE, CHINA, COLOMBIA, CZECHIA, FRANCE, GERMANY, GREAT BRITAIN, INDIA, IRAN, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, SINGAPORE, SLOVAKIA, SPAIN, SWITZERLAND, THAILAND, USA, VENEZUELA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
☎ +49(0)6192 299-0
Fax +49(0)6192 23398
E-Mail: info.de@kobold.com
Internet: www.kobold.com

Model:
NEW



Description


KOBOLD limit switches of model NEW are used for level monitoring and pump control of conductive liquids. The design without any moving parts also allows service with critical media with, for example, solid content, negligible density or high viscosity.

The instruments operate on the conductive principle. A low a. c. voltage is applied between the earth electrode and a switching point electrode. The a. c. voltage is electrically isolated from the mains for safety reasons. If the conductive medium touches the electrodes, a negligible alternating current flows across the electrodes and the conductive medium to the electrode relay. The relay amplifies the alternating current and operates a switching relay or a pump controller.

One electrode NEW-... and one electrode relay type NE-204 are required per switch point for overflow protection* (according to § 19 WHG).

*For vessels for storing water-contaminating liquids

Dimensions

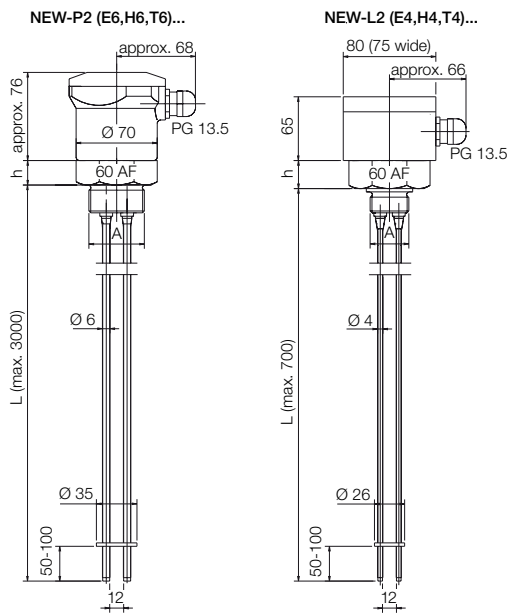

Technical Details

- Housing: Polyamide or aluminium
- Connections: G 1 or G 1½
Polypropylene, PTFE or stainless steel 1.4571
- Electrodes: stainless steel 1.4571, Hastelloy or Titanium
- Electrode coating: PTFE (complete coating)
- Number of electrodes: 2
- Bridging resistance: 47 kΩ
- Max. temperature: -20 to +60 °C
- Max. pressure: pressureless
- Protection: IP 65

Electrode relay

For technical details please refer to pp. 41-44 (Electrode relay model NE).

Order Details electrode relay

Description of electrode relay	Supply	
	Order no. 24 V _{AC}	Order no. 230 V _{AC}
1 limit signal open-circuit detection, switches to the alarm state if auxiliary power fails.	NE-2042	NE-2040

Order Details (Example: NEW-P2 E 4 VP 25)

Model	Description	Housing and number of electrodes	Electrode	Electrode diameter and coating	Screwed fitting	Connection and length of electrodes
NEW-	Conductive level limit switches	<p>P2 = Polyamide housing/ double-electrodes</p> <p>L2 = Aluminium housing double-electrodes</p>	<p>E = St. steel</p> <p>H = Hastelloy C</p> <p>T = Titanium</p>	<p>4 = Ø 4 mm PTFE-coating</p> <p>6 = Ø 6 mm PTFE-coating</p>	<p>VP = Polypropylene</p> <p>VE = St. steel</p> <p>VF = PTFE</p>	<p>25 = G 1 (Ø 4 mm electrode max. 700 mm*)</p> <p>40 = G 1½ (Ø 6 mm electrode max. 3000 mm*)</p>

*Please show the length of electrodes in clear text.

