


Multi-Parameter Vortex Flow Meter

DVE



- **Volumetric or mass flow monitoring of most liquids, gases, and steam**
- **Integrated temperature- and pressure measurement as well as calculation of density (optional)**
- **Energy Monitoring—ability to compute and output energy use**
- **High accuracy with rangeability up to 100:1**
- **High temperature version up to 400°C**
- **High pressure version up to 100 bar**
- **Easy to install and commission by means of field configurable ranges, outputs and displays.**
- **Hot tappable, process shut down not required for installation**
- **HART protocol communications - Standard**
- **Modbus communications available**



Heinrichs DVE multi parameter Vortex flow meters utilize three primary sensing elements:

a vortex shedding velocity sensor

an RTD temperature sensor

and a solid-state pressure transducer

to measure the mass flow rate of gases, liquids and steam.

Systems that use external process measurements may not provide adequate compensation for the fact that process conditions can change radically between the point of velocity measurement and the point where upstream or downstream pressure and temperature measurements are being made. Because the DVE is able to measure all process variables within a single device it provides exceptional accuracy, simplifies system design and reduces installation costs.

To enhance reliability, the DVE insertion flow meters feature a no-moving parts design and rugged, welded construction.

DVE-V cost-effective monitoring of most liquids, gases, and steam.

DVE-T integrates an RTD temperature sensor that enables to measure the mass flow rate of saturated steam.

DVE-P is a multi parameter instrument that delivers volumetric flow rate, mass flow rate, pressure, temperature and density.

DVE-M Energy Monitoring option permits real-time calculation of energy consumption for a facility or process

Field configurable ranges, outputs and displays

HART protocol communications

ATEX, IEC Ex Approved

Model DVE-V

The Model DVE-V delivers a direct reading of volumetric flow rate-- generally the most cost-effective solution for liquid flow monitoring - in applications ranging from general water flows to hydrocarbon fuel flow measurement

Model DVE-T

The Model DVE-VT integrates a precision 1000 Ohm platinum RTD temperature sensor that can be used to calculate and output a compensated mass reading. This device is typically used to measure flow rates of saturated steam

Model DVE-P


The Model DVE-VTP offers you flow computer functionality in a compact field device. This multivariable instrument incorporates temperature and pressure sensors to provide an instantaneous reading of compensated mass flow rate of gases, liquids and steam. In addition to outputs for totalized mass and alarm settings, the field-configurable electronics deliver up to three analog 4-20 mA outputs of five process measurements, including volumetric flow rate, mass flow rate, pressure and density

Model DVE-M

The Model DVH-M Energy Monitoring option permits real-time calculation of energy consumption for a facility or process. The meter can be programmed to measure steam, hot water or chilled water. The Model DVH-P flow meter monitors one side of the process, either sent or return, and uses the input from a second separate temperature sensor on the opposite leg of the process to calculate the change in energy.


Selectable energy units include Btu, joules, calories, Watt-hours, Megawatt-hours and Horsepower-hours. The local or remote electronics indicate two temperatures, delta T, mass total and energy total.

(Not approved for custody transfer applications)




Technical Data

Measuring principle

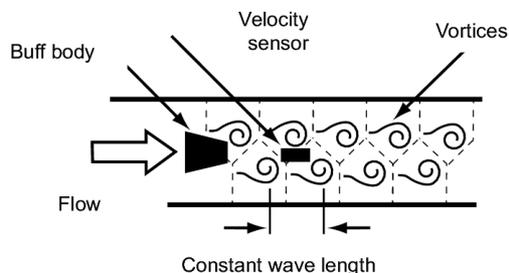

Vortex flow meters measure flows of liquid, gas and steam by detecting the frequency at which vortices are alternately shed from a bluff body. According to proven laws of physics, the frequency at which the vortices are alternately shed is directly proportional to the flow velocity. Insertion vortex flow meters measure flow by detecting the local velocity at a strategically located position within the pipe. The DVE detects the frequency at which vortices are alternately shed from the bluff body located within the sensor head. The DVE uses the local velocity, along with other parameters, such as fluid type, pipe size and Reynolds number to calculate the average pipe velocity, and consequently, the volumetric flow rate. .

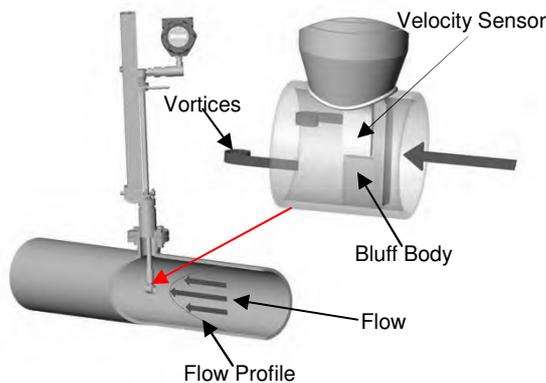

Accuracy

Mass flow rate accuracy for gas and steam based on 50-100% of pressure range.

Modell DVE Multiparameter Flow Meter

| Process Variables | Liquids | Gas & Steam |
|----------------------|----------------------|---------------------|
| Volumetric Flow Rate | ± 1,2% of Rate | ± 1,5% of Rate |
| Mass Flow Rate | ± 1,5% of Rate | ± 2,0 of Rate |
| Temperature | ± 1 °C, (± 2 °F) | ± 1 °C, (± 2 °F) |
| Pressure | ±0,3% of Full Scale | ±0,3% of Full Scale |
| Density | ±0,3% vom of Reading | ±0,5% of Reading |

Repeatability

| | |
|----------------------|-----------------------|
| Mass Flow Rate | ±0, 2% of rate |
| Volumetric Flow Rate | ±0, 1% of rate |
| Temperature | ± 0,1 °C, (±0,2 °F) |
| Pressure | ±0, 05% of full scale |
| Density | ±0, 1% of reading |

Stability over 12 Month

| | |
|----------------------|---------------------|
| Mass Flow Rate | ±0,2% of rate |
| Volumetric Flow Rate | ± negligible |
| Temperature | ±0,5°C,(±0,9°F) |
| Pressure | ±0,1% of full scale |
| Density | ±0,1% of reading |

Response Time

Adjustable from 1 to 100 seconds

Operating Specifications

Process and Ambient Temperature

| | |
|--------------------|---------------------------------|
| Standard: | -200 to 260 °C (-330 to 500 °F) |
| High Temperature: | to 400 °C, (750 °F) |
| Ambient Operating: | -40 to 85 °C (-40 to 185 °F) |
| Ambient Storage: | -40 to 85 °C (-40 to 185 °F) |

Pressure Transducer Ratings


| Full Scale Operating Pressure | | Max. Over-Range Pressure | |
|-------------------------------|---------|--------------------------|---------|
| psia | bar abs | psia | bar abs |
| 30 | 2 | 60 | 4 |
| 100 | 7 | 200 | 14 |
| 300 | 20 | 600 | 40 |
| 500 | 35 | 1000 | 70 |
| 1500 | 100 | 2500 | 175 |

Power Requirements

| | |
|--------------|------------------------------------|
| Model DVE-V: | 12-36 VDC loop powered |
| Model DVE-P: | DC-Option: 12-36 VDC, 300 mA max. |
| Model DVE-P: | AC-Option: 85-240 VAC, 50/60Hz, 5W |

Display

Alphanumeric 2 line x 16 character LCD digital display
Six pushbuttons for full field configuration
Pushbuttons can be operated with magnetic wand without removal of the enclosure covers
Display can be mounted in 90° intervals for better viewing



Output Signals

Analog: 4-20 mA
 Alarm: Solid state relay, 40 VDC
 Totalizer Pulse: 50 ms pulse, 40 VDC
 Volumetric or
 Loop Powered Mass: One analog, one totalizer pulse, HART
 Multivariable option: Up to three analog signals, three alarms, one totalizer pulse, HART
 Multivariable option: Modbus process monitoring

Physical Specifications

Wetted Materials

Housing / Bluff Body / Flanges/Sensors: stainless steel 1.4404 (316L), DuPont Teflon® based thread sealant on models with pressure transducer. DuPont Teflon® packing on standard temperature models with packing gland. Graphite based packing on high temperature models with packing gland.

Approvals

ATEX: II 2G Ex d IIB + H2 T6
 II 2D EX tD A21 IP66 T85°C
 Ta-40...+60°C
 IECEx: Ex d IIB + H2 T6
 Ex tD A21 IP 66 T 85°C, Ta=-40...+60°C

Sizing Considerations

Piping Conditions

| Condition | Pipe Diameter D | |
|---|-----------------|-------------|
| | Upstream | Down-stream |
| One 90° elbow before meter | 10 D | 5 D |
| Two 90° elbows before meter | 15 D | 5 D |
| Two 90° elbows before meter, out of plane | 25 D | 5 D |
| Reduction before meter | 10 D | 5 D |
| Expansion before meter | 20 D | 5 D |
| Partially open valve | 25 D | 5 D |


Velocity Range

Maximum velocity, liquid: 30 feet/sec (9 meters/second)
 Minimum velocity, liquid: 1 foot/sec (.3 meters/second)
 Maximum velocity, gas or steam: 300 feet/sec (90 meters/second)
 Minimum velocity, gas or steam feet/sec (meters/second):

$$\frac{6,1}{\sqrt{\text{Dichte} \left(\frac{\text{Kg}}{\text{m}^3} \right)}} \quad \frac{5}{\sqrt{\text{Dichte} \left(\frac{\text{Lb}}{\text{ft}^3} \right)}}$$

Water Minimum and Maximum Flow Rates

| Rate | Nominal Pipe Size (inch) | | | | | |
|------------------------|--------------------------|------|------|------|-------|-------|
| | 3 | 6 | 8 | 12 | 16 | 24 |
| GPM min | 20,6 | 81,3 | 142 | 317 | 501 | 1138 |
| GPM max | 618 | 2437 | 4270 | 9501 | 15043 | 34144 |
| Nominal Pipe Size (mm) | | | | | | |
| | 80 | 150 | 200 | 300 | 400 | 600 |
| m³/h min | 5,2 | 20,4 | 35,4 | 79,2 | 125 | 284 |
| m³/h max | 157 | 614 | 1062 | 2337 | 3753 | 8537 |




| Typical Saturated Steam Minimum and Maximum Flow Rates (kg/hr) | | | | | | |
|--|--------------|---------------|----------------|----------------|----------------|------------------|
| Nominal Pipe Size (mm) | | | | | | |
| Pressure | 80 | 150 | 200 | 300 | 400 | 600 |
| 0 bar g | 81 938 | 316 3667 | 548 6350 | 1226 14209 | 1936 22432 | 4404 51039 |
| 5 bar g | 187 4986 | 729 19486 | 1263 33742 | 2826 75495 | 4461 119189 | 10151 271187 |
| 10 bar g | 249 8859 | 972 34620 | 1683 33742 | 3767 134132 | 5947 211764 | 13530 481821 |
| 15 bar g | 298 12700 | 1164 49629 | 2016 85939 | 4510 192283 | 7120 303570 | 16200 690705 |
| 20 bar g | 340 16550 | 1329 64676 | 2301 111995 | 5148 250581 | 8128 395609 | 18493 900119 |
| 30 bar g | 412 24357 | 1612 95187 | 2791 164827 | 6246 368789 | 9860 582234 | 22435 1324739 |


| Typical Air Minimum and Maximum Flow Rates (nm3/hr) Air at 20°C | | | | | | |
|--|--------------|----------------|----------------|----------------|------------------|------------------|
| Nominal Pipe Size (mm) | | | | | | |
| Pressure | 80 | 150 | 200 | 300 | 400 | 600 |
| 0 bar g | 89 1463 | 347 5716 | 601 9897 | 1345 22145 | 2124 34962 | 4833 79547 |
| 5 bar g | 217 8702 | 847 34006 | 1467 58885 | 3282 131751 | 5181 208004 | 11788 473266 |
| 10 bar g | 294 15975 | 1148 62430 | 1987 108105 | 4446 241878 | 7020 381870 | 15972 868857 |
| 15 bar g | 355 23280 | 1385 90979 | 2399 157542 | 5368 352487 | 8474 556497 | 19282 1266182 |
| 20 bar g | 407 30615 | 1589 119642 | 2751 207175 | 6156 463539 | 9718 731823 | 22112 1665095 |
| 30 bar g | 495 46361 | 1934 177268 | 3349 306961 | 7493 686801 | 11829 1084302 | 26915 2467081 |

| Typical Saturated Steam Minimum and Maximum Flow Rates (lb/hr) | | | | | | |
|--|--------------|----------------|----------------|-----------------|------------------|------------------|
| Nominal Pipe Size (in) | | | | | | |
| Pressure | 3 | 6 | 8 | 12 | 16 | 24 |
| 5 psig | 205 2721 | 800 10633 | 1385 18412 | 3099 41196 | 4893 65039 | 11132 147954 |
| 100 psig | 468 14246 | 1831 55674 | 3170 96407 | 7092 215703 | 11197 340546 | 25472 774698 |
| 200psig | 632 25948 | 2471 101405 | 4278 175595 | 9572 392880 | 15111 620268 | 34377 1411029 |
| 300 psig | 762 37652 | 2976 147145 | 5153 254799 | 11530 570093 | 18203 900047 | 41410 2047489 |
| 400 psig | 873 49494 | 3412 193420 | 5908 334930 | 13219 749382 | 20870 1183103 | 47477 2691404 |
| 500 psig | 974 61543 | 3805 240507 | 6588 416468 | 14741 931816 | 23272 1471125 | 52942 3346615 |

| Typical Air Minimum and Maximum Flow Rates (SCFM) Air at 70°F | | | | | | |
|--|--------------|----------------|----------------|----------------|----------------|------------------|
| Nominal Pipe Size (in) | | | | | | |
| Pressure | 3 | 6 | 8 | 12 | 16 | 24 |
| 0psig | 56 924 | 220 3611 | 381 6253 | 852 13991 | 1345 22089 | 3059 50250 |
| 100 psig | 157 7236 | 615 28279 | 1065 48969 | 2383 109564 | 3763 172977 | 8560 393500 |
| 200psig | 216 13588 | 843 53101 | 1460 91950 | 3266 205732 | 5156 324804 | 11729 738886 |
| 300 psig | 262 19974 | 1022 78059 | 1770 135169 | 3960 302430 | 6251 477467 | 14221 1086176 |
| 400 psig | 301 26391 | 1175 103136 | 2034 178593 | 4551 399588 | 7186 630859 | 16346 1435121 |
| 500 psig | 335 32834 | 1310 128314 | 2269 222191 | 5077 497136 | 8015 784865 | 18233 1785464 |




Dimensional Outline: Compression Fitting Models

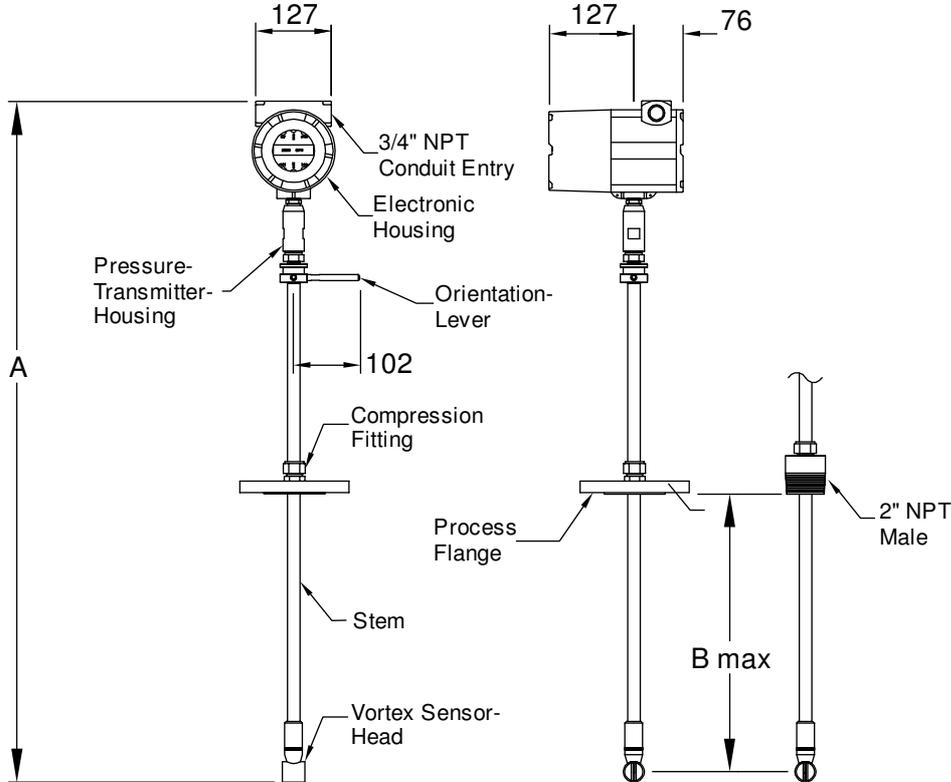


| Model DVE-V, T | CL / Compact Length | | SL / Standard Length | | EL / Extended Length | | Weight kg | | |
|--|---------------------|--------|----------------------|--------|----------------------|--------|-----------|-----|-----|
| | A | B | A | B | A | B | CL | SL | EL |
| Compression Fitting 2" NPT male | 549 mm | 249 mm | 965 mm | 665 mm | 1270 mm | 970 mm | 5,7 | 6,2 | 6,7 |
| Compression Fitting 150 lb / PN16 Flange | 549 mm | 277 mm | 965 mm | 693 mm | 1270 mm | 998 mm | 6,8 | 7,3 | 7,8 |
| Compression Fitting 300 lb / PN40 Flange | 549 mm | 274 mm | 965 mm | 691 mm | 1270 mm | 996 mm | 7,8 | 8,3 | 8,8 |
| Compression Fitting 600 lb / PN64 Flange | 549 mm | 264 mm | 965 mm | 681 mm | 1270 mm | 986 mm | 8,2 | 8,7 | 9,2 |

| Model DVE-P | CL / Compact Length | | SL / Standard Length | | EL / Extended Length | | Weight kg | | |
|--|---------------------|--------|----------------------|--------|----------------------|--------|-----------|-----|-----|
| | A | B | A | B | A | B | CL | SL | EL |
| Compression Fitting 2" NPT male | 625 mm | 249 mm | 1041 mm | 665 mm | 1346 mm | 970 mm | 5,7 | 6,2 | 6,7 |
| Compression Fitting 150 lb / PN16 Flange | 625 mm | 277 mm | 1041 mm | 693 mm | 1346 mm | 998 mm | 6,8 | 7,3 | 7,8 |
| Compression Fitting 300 lb / PN40 Flange | 625 mm | 274 mm | 1041 mm | 691 mm | 1346 mm | 996 mm | 7,8 | 8,3 | 8,8 |
| Compression Fitting 600 lb / PN64 Flange | 625 mm | 264 mm | 1041 mm | 681 mm | 1346 mm | 986 mm | 8,2 | 8,7 | 9,2 |

Add 5 kg for remote electronics



Dimensional Outline: Packing Gland Models / Retractor Device Models

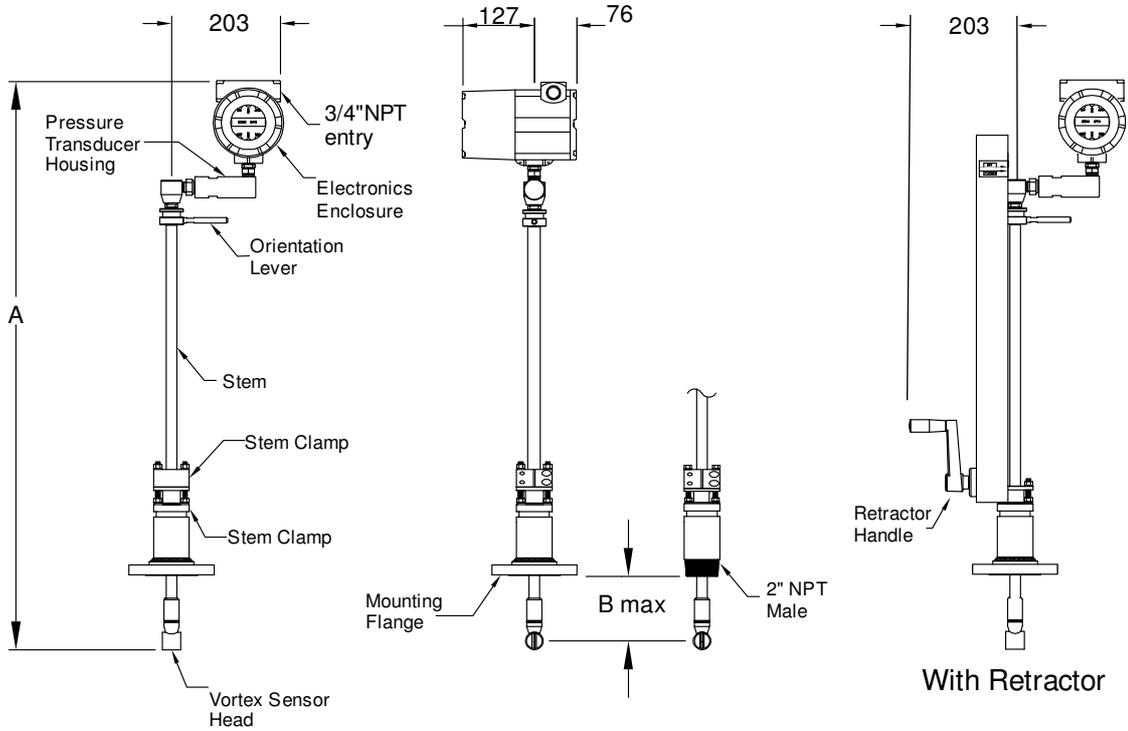


Dimensions in mm


| Model DVE with compression fitting / Retractor Device | SL / Standard Length | | EL / Extended Length | | Weight kg | | Weight kg incl. Retractor Device | |
|---|----------------------|--------|----------------------|--------|-----------|-----|----------------------------------|------|
| | A | B | A | B | SL | EL | SL | EL |
| Compression Fitting NPT male | 1029 mm | 546 mm | 1334 mm | 851 mm | 7,5 | 7,8 | 11,5 | 14,5 |
| Compression Fitting 150 lb / PN16 Flange | 1029 mm | 536 mm | 1334 mm | 841 mm | 9,5 | 10 | 13,7 | 16,7 |
| Compression Fitting 300 lb / PN40 Flange | 1029 mm | 536 mm | 1334 mm | 841 mm | 11,5 | 12 | 15,5 | 18,5 |
| Compression Fitting 600 lb / PN64 Flange | 1029 mm | 536 mm | 1334 mm | 841 mm | 12,5 | 15 | 16 | 19 |

Add 5 kg for remote electronics

Dimensional Outline: Remote Electronics Option

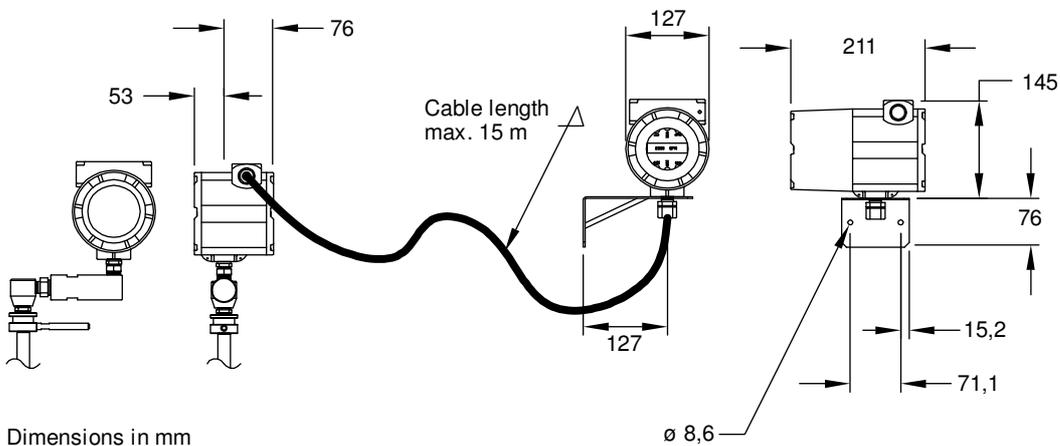

Dimensions in mm



| MODEL CODE Insertion Version | | | | |
|---|--|---------------------------|--|---|
| DVE | | | | |
| Electronic - Options | | | | |
| V | Volume Measurement of Liquids, Gases and Steam | | | |
| T | Flow Velocity including temperature sensor | | | |
| P | Flow Velocity including temperature and pressure sensor | | | |
| E | Energy Consumption Measurement including temperature sensor | | | |
| M | Energy Consumption Measurement including temperature and pressure sensor | | | |
| X | Special (on request) | | | |
| Probe length | | | | |
| S | Standard length | | | (Max.Stem Length~ 690 mm) |
| C | compact length | | | (Max.Stem Length~ 275 mm) |
| E | Extended version | | Only with Process Connection T/U/V/W/Y/Z/1 | (Max.Stem Length~ 995 mm) |
| X | Special (on request) | | | |
| Sensor Configuration / Mounting Option | | | | |
| L | Compact | incl. LCD Display | IP 65 / Nema 4 | |
| 2 | Compact | w/o LCD Display | IP 65 / Nema 4 | |
| R | remote | incl. LCD Display | IP 65 / Nema 4 | Specify cable length in m (max.15 m) |
| 3 | remote | w/o LCD Display | IP 65 / Nema 4 | Specify cable length in m (max.15 m) |
| x | Special (on request) | | | |
| Input Power | | | | |
| L | 12-36 VDC | loop powered | | |
| D | 12-36 VDC | 4-Leiter | only with output option H / M / 3 / 4 | |
| A | 85-240 VAC | 50/60 Hz 12 W | only with output option H / M / 3 / 5 | |
| Output signal | | | | |
| 2 | 1x 4-20mA, HART, Loop powered | 1x Pulse | only with input power L passive | |
| H | 1x 4-20mA HART | 1x Alarm, 1x Pulse | only with input power D/ A passive | |
| M | 1x 4-20mA | 1x Alarm, 1x Pulse MODBUS | only with input power D/ A passive | |
| 3 | 3x 4-20 mA HART | 3x Alarm, 1x Pulse | only with input power D/ A passive | |
| 4 | 3x 4-20 mA | 3x Alarm, 1x Pulse MODBUS | only with input power D/ A passive | |
| X | Special (on request) | | | |
| Process temperature | | | | |
| S | Standard temperature | -200....+260 °C | -330....+500 °F | |
| H | High Temperature | -200....+400 °C | -330+750 °F | |
| X | Special (on request) | | | |
| Option Pressure Sensor (Electronic versions T/P/E/M) | | | | |
| 0 | w/o Pressure Sensor | | | Electr.version V / T / E Max. test pressure |
| 1 | Incl. Pressure Sensor | 2 bar abs (30 psia) | Electr.version P / M | 4 bar abs.(60 psia) |
| 2 | Incl. Pressure Sensor | 7 bar abs (100 psia) | Electr.version P / M | 14 bar abs. (200 psia) |
| 3 | Incl. Pressure Sensor | 20 bar abs (300 psia) | Electr.version P / M | 41 bar abs. (600 psia) |
| 4 | Incl. Pressure Sensor | 34 bar abs (500 psia) | Electr.version P / M | 64 bar abs. (1000 psia) |
| 5 | Incl. Pressure Sensor | 100 bar abs (1500 psia) | Electr.version P / M | 175 bar abs. (2500 psia) |
| X | Special (on request) | | | |
| Process Connection | | | | |
| A | 2" NPT | Male thread | Sensor Bushing Compression fitting | |
| B | 2" 150lbs | Flange | Compression fitting | |
| C | DN 50 PN16 | Flange | Compression fitting | |
| D | 2" 300 lbs | Flange | Compression fitting | |
| E | DN 50 PN 40 | Flange | Compression fitting | |
| F | 2" 600 lbs | Flange | Compression fitting | |
| G | DN 50 PN 64 | Flange | Compression fitting | |
| H | 2" NPT | Male thread | Packing gland | |
| I | 2" 150 lbs | Flange | Packing gland | |
| J | DN 50 PN16 | Flange | Packing gland | |
| K | 2" 300 lbs | Flange | Packing gland | |
| L | DN 50 PN 40 | Flange | Packing gland | |
| M | 2" NPT | Male Thread | incl. Retraction device | Packing gland |
| N | 2" 150 lbs | Flange | incl. Retraction device | Packing gland |
| O | DN 50 PN16 | Flange | incl. Retraction device | Packing gland |
| P | 2" 300 lbs | Flange | incl. Retraction device | Packing gland |
| Q | DN 50 PN 40 | Flange | incl. Retraction device | Packing gland |
| R | 2" 600 lbs | Flange | incl. Retraction device | Packing gland |
| S | DN 50 PN 64 | Flange | incl. Retraction device | Packing gland |
| T | 2" NPT (only Ext. length) | Male Thread | incl. Retraction device | Packing gland |
| U | DN 50 PN16 (only Ext.length) | Flange | incl. Retraction device | Packing gland |
| V | DN 50 PN 40 (only Ext.length) | Flange | incl. Retraction device | Packing gland |
| W | DN 50 PN 64 (only Ext.length) | Flange | incl. Retraction device | Packing gland |
| Y | 2" 150 lbs (only Ext.length) | Flange | incl. Retraction device | Packing gland |
| Z | 2" 300 lbs (only Ext.length) | Flange | incl. Retraction device | Packing gland |
| 1 | 2" 600 lbs (only Ext.length) | Flange | incl. Retraction device | Packing gland |
| X | Special (on request) | | | |

For more information see: www.heinrichs.eu

Heinrichs Messtechnik GmbH
Mailbox 600260
D-50682 Cologne

Robert-Perthel-Straße 9
D-50739 Cologne

Phone. +49-221-49708-0
Fax +49-221-49708-178

info@heinrichs.eu
www.heinrichs.eu