




Magnetic Inductive Flow Meter



measuring
• monitoring
• analysing

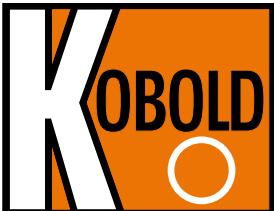

- Measuring range:
0...3.3 m³/h, DN10 up to
0...33929 m³/h, DN1000
- Accuracy:
±0.3 % of reading
- p_{max} PN 40, t_{max} 180 °C
- Flange DN 10...1000,
DIN/ANSI
- Analogue, frequency,
connection and
status output
- No pressure drop
because of pipe restriction
- No influence of the density,
viscosity and temperature
on the measurement results
- Complete draining
possible



KOBOLD companies worldwide:


ARGENTINA, AUSTRIA, BELGIUM, CANADA, CHILE, CHINA, CZECHIA,
FRANCE, GERMANY, GREAT BRITAIN, INDIA, INDONESIA, ITALY,
MALAYSIA, MEXICO, NETHERLANDS, POLAND, SINGAPORE, SLOVAKIA,
SPAIN, SWITZERLAND, THAILAND, USA, VENEZUELA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
☎ +49(0)6192 299-0
Fax +49(0)6192 23398
E-Mail: info.de@kobold.com
Internet: www.kobold.com

Model:
MID

Description

The new MID-type KOBOLD flow meters operates according to the magnetic induction measurement principle. According to Faraday's Law of magnetic induction a voltage is induced in a conductor moving through a magnetic field. The electrically conductive measuring agent acts as the moved conductor. The voltage induced in the measuring agent is proportional to the flow velocity and is therefore a value for the volumetric flow. The flowing media must have a minimum conductivity. The induced voltage is picked up by two sensing electrodes which are in contact with the measuring agent and sent to the measuring amplifier. The flow rate will be calculated based on the cross sectional area of the pipe. The measurement is not depending on the process liquid and its material properties such as density, viscosity and temperature.

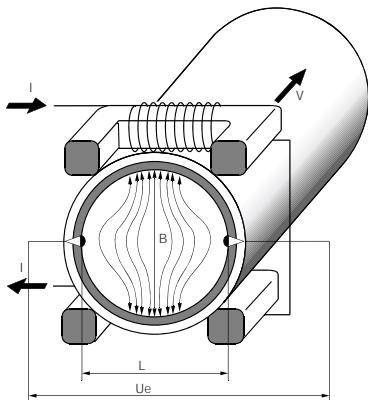

Applications

All fluids can be measured with a minimum conductivity of $> 5 \mu\text{S}/\text{cm}$ (for deionized water $> 20 \mu\text{S}/\text{cm}$).

MID-1

- Drinking water
- Raw water, sea water
- Ground water for irrigation
- Sewage, sludge
- Cooling water
- Leakage monitoring
- Mining, metal processing

MID-2

- Acids, caustic solutions in chemical and pharmaceutical industries
- Water and hot water in power plants
- Industrial effluent
- Paper industry
- Metal processing
- Abrasive agents
- Liquids with high levels of solids

Technical data

End values in the measurement range: 0.3...12 m/s (see also the table)

Accuracy:

$\pm 0.3\%$ of the measured value $\pm 2 \text{ mm/s}$ (DN 10 - 600)
 $\pm 0.5\%$ of the measured value $\pm 2 \text{ mm/s}$ (DN 700 - 1000) (see also accuracy diagram)

Repeatability:

$\pm 0.1\%$

Solid content:

$< 3\%$ (by volume)

Conductivity:

at least $5 \mu\text{S}/\text{cm}$ (liquids except water)
at least $20 \mu\text{S}/\text{cm}$ (water)

Operating temp.:

-5...+90°C (PP-lining)
-5...+80°C (hard rubber)
-40...+120°C (PTFE/PFA lining, compact version)
-40...+180°C (PTFE/PFA lining, separate version)
-40...+120°C (ETFE-lining)

Ambient temp.:

-25...+60°C (compact version or wall mounted electronic board)
-40...+65°C (separate version, measurement sensor)

Max. pressure:

PN 40

Materials

Lining materials: polypropylene, hard rubber, PTFE, ETE or PFA

Electrodes:

Hastelloy C4, stainless steel 1.4571, tantalum, platinum or titanium

Earthing washers:

Hastelloy C4, stainless steel 1.4571, titanium

Flange:

steel or stainless steel 1.4404

Measuring tube:

Austenitischer stainless steel

Sensor housing:

steel, with polyurethane lining

Electronic case:

mounting plate:
painted Aluminium

Cover:

polyurethane (compact version)

Polyamide/polycarbonate
(wall housing)

painted Aluminium
(separate version on sensor)

Display:

three-line LCD display;
8 digits + 10 digits + 6 markers

Languages :

German, English, French

Display function:
present flow, forwards and backwards counter, and totalizer (7 digits), or 25-digit bar graph indication with percentage indication and status messages


Technical data (continued)

Other functions:	empty pipe detection, readout attenuation, electrode cleaning (optional)	Status output:	F/B monitoring, limit value, pipe duct, Error; active/passive
Time constant:	0.2 - 99.9 s in 0.1 second-steps adjustable	Electr. connection:	cable gland M20x1.5 or thread connection 1/2 NPT, G 1/2
Low flow cut-off		Signal transmission:	5 - 300 m (separate version)
Switch-on threshold:	1 - 19 % of Q 100 %, in 1 %-steps	Power supply:	230 V _{AC} , 115 V _{AC} (48 - 63 Hz) or 24 V _{DC}
Switch-off threshold:	2 - 20 % of Q 100 %, in 1 %-steps	Input:	5 VA (AC); 4.5 W (CC)
Current output:	0(4) - 20 mA; active/passive	Type of protection:	IP 65 or NEMA 4 / 4X
Max. load:	500 Ω by active connection		IP 66/67 or NEMA 4 / 4X / 6 (separate version, sensor)
Pulse output:	Pulse/volume; Pulse/time; active/passive		IP 68 on request

Vacuum resistance

Lining	Flange [mm]	Minimum pressure [mbar abs.] at an operating temperature of...								
		20 °C	40 °C	60 °C	70 °C	80 °C	100 °C	120 °C	140 °C	180 °C
Polypropylene/hard rubber	DN 10-150	250	250	400	400	400	-	-	-	-
Hard rubber	DN 200-300	250	250	400	400	400	-	-	-	-
	DN 350-1000	500	500	600	600	600	-	-	-	-
PTFE	DN 10-20	0	0	0	0	0	0	500	750	1000
	DN 200-300	500	500	750	1000	1000	1000	1000	1000	1000
	DN 350-600	800	1000	1000	1000	1000	1000	1000	1000	1000
ETFE	DN 200-1000	100	100	100	100	100	100	100	-	-
PFA	DN 25-150	0	0	0	0	0	0	0	0	0


Accuracy diagram (DN 10 - 600)

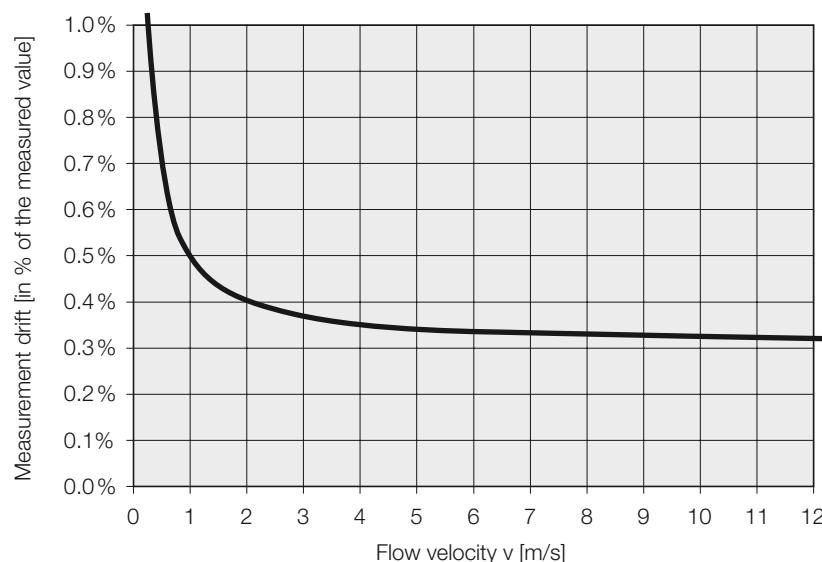

End values in the measurement range

DN	Q _{100%} in m ³ /h		
	0.3 m/s	3 m/s	12 m/s
10	0.085	0.848	3.393
15	0.191	1.909	7.634
20	0.339	3.393	13.57
25	0.530	5.301	21.21
32	0.869	8.686	34.74
40	1.357	13.57	54.29
50	2.121	21.21	84.82
65	3.584	35.84	143.4
80	5.429	54.29	217.2
100	8.482	84.82	339.3
125	13.25	132.5	530.2
150	19.09	190.9	763.4
200	33.93	339.3	1357
250	53.01	530.1	2121
300	76.34	763.4	3054
350	103.9	1039	4156
400	135.7	1357	5429
450	171.8	1718	6871
500	212.1	2121	8482
600	305.4	3054	12215
700	415.6	4156	16625
800	542.9	5429	21715
900	687.1	6871	27482
1000	848.2	8482	33929

Electrical connection

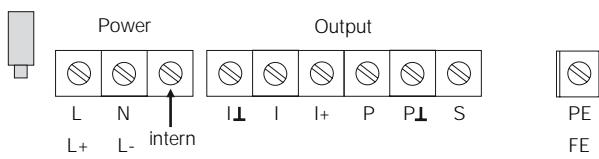

Pressure rating

Nominal pressure acc. to the connection type	Nominal diameter																							
	10 / DN 10	15 / DN 15	20 / DN 20	25 / DN 25	32 / DN 32	40 / DN 40	50 / DN 50	65 / DN 65	80 / DN 80	100 / DN 100	125 / DN 125	150 / DN 150	200 / DN 200	250 / DN 250	300 / DN 300	350 / DN 350	400 / DN 400	450 / DN 450	500 / DN 500	600 / DN 600	700 / DN 700	800 / DN 800	900 / DN 900	1100 / DN 1000
EN 1092-1 - PN 40	S	S	S	S	S	S	S	O	S	O	O	O	O	O	O	O	O	O	O	O	÷	÷	÷	÷
EN 1092-1 - PN 25	÷	÷	÷	÷	÷	÷	÷	O	÷	O	O	O	O	O	O	O	O	O	O	O	÷	÷	÷	÷
EN 1092-1 - PN 16	÷	÷	÷	÷	÷	÷	÷	S	÷	S	S	S	O	O	O	O	O	O	O	O	÷	÷	÷	÷
EN 1092-1 - PN 10	÷	÷	÷	÷	÷	÷	÷	÷	÷	÷	÷	÷	S	S	S	S	S	S	S	S	S	S	S	S
ANSI B16.5 - 150 lbs RF	S	S	÷	S	÷	S	S	÷	S	S	S	S	S	S	S	S	S	S	S	S	÷	÷	÷	÷
ANSI B16.5 - 300 lbs RF	O	O	÷	O	÷	O	O	÷	O	O	O	O	O	O	O	O	O	O	O	O	÷	O	O	÷

S = Standard; O = Option; ÷ = on request

Order details (ordering example: MID-1A 25 H 0 A A 0 0 L)

Water and sewage applications

Type / type of connection*	Nominal diameter*	Lining	Electrodes material	Version	Gland	Power supply of electronics	Option	Mounting position
MID-1A = Flange steel, PN 40	25 = DN 25 / 1"			A = compact vers.				
MID-1B = Flange steel, PN 25	32 = DN 32			B = separate version with 5 m cable				L = from the left to the right, display on the upper part (standard)
MID-1C = Flange steel, PN 16	40 = DN 40 / 1 1/2"			C = separate version with 10 m cable				
MID-1D = Flange steel, PN 10	50 = DN 50 / 2"	H = Hard rubber		D = separate version with 15 m cable	A = M20x1.5 with cable gland	0 = 230 V _{AC}	0 = Standard	
MID-1F = Flange st. steel 1.4404, PN 40	65 = DN 65		P = PP-lining	E = separate version with 20 m cable	B = 4 = 115 V _{AC}	5 = Readout stability		R = from the right to the left, display on the upper part
MID-1G = Flange st. steel 1.4404, PN 25	80 = DN 80 / 3"			F = separate version with 25 m cable	1 = 48 V _{AC}	1 = Pipe duct monitoring		B = from the bottom to the top, display on the right
MID-1H = Flange st. steel 1.4404, PN 16	1H= DN 100 / 4"			G = separate version with 30 m cable	2 = 24 V _{AC}			
MID-1K = Flange st. steel 1.4404, PN 10	1Z= DN 125 / 5"			H = separate version with 40 m cable	3 = 24 V _{DC}			
MID-1L = ANSI-Flange steel, 150 lbs	1F = DN 150 / 6"			I = separate version with 50 m cable				
MID-1M = ANSI-Flange steel, 300 lbs	2H= DN 200 / 8"			K = separate version with 100 m cable				
MID-1R = ANSI-Flange st. steel 1.4404, 150 lbs	2F = DN 250 / 10"							
MID-1S = ANSI-Flansch st. steel 1.4404, 300 lbs	3H= DN 300 / 12"	H = Hard rubber						T = from the top to the bottom, display on the right
	3F = DN 350 / 14"							
	4H= DN 400 / 16"							
	4F = DN 450							
	5H= DN 500 / 20"							
	6H= DN 600 / 24"							
	7H= DN 700 / 28"							
	8H= DN 800 / 32"							
	9H= DN 900 / 36"							
	1T = DN 1000 / 40"							

Process and chemical applications

Type / type of connection*	Nominal diameter*	Lining	Electrodes material	Version	Gland	Power supply of electronics	Option	Mounting position
MID-2A = Flange steel, PN 40	10 = DN 10 / 3/8" 15 = DN 15 / 1/2" 20 = DN 20	T = PTFE lining		A = compact vers. B = separate version with 5 m cable C = separate version with 10 m cable D = separate version with 15 m cable E = separate version with 20 m cable F = separate version with 25 m cable G = separate version with 30 m cable H = separate version with 40 m cable I = separate version with 50 m cable K = separate version with 100 m cable				
MID-2B = Flange steel, PN 25	25 = DN 25 / 1"							
MID-2C = Flange steel, PN 16	32 = DN 32							
MID-2D = Flange steel, PN 10	40 = DN 40 / 1 1/2"							
MID-2F = Flange st. steel 1.4404, PN 40	50 = DN 50 / 2"							
MID-2G = Flange st. steel 1.4404, PN 25	65 = DN 65	A = PFA lining	0 = Hastelloy C4 (standard)	A = M20x1.5 with cable gland		0 = 230 V _{AC}	O = Standard	L = from the left to the right, display on the upper part (standard)
MID-2H = Flange st. steel 1.4404, PN 16	80 = DN 80 / 3"		1 = stainl. steel DIN 1.4571/ 316Ti	4 = Hastelloy B2		4 = 115 V _{AC}	5 = Readout stability	R = from the right to the left, display on the upper part
MID-2K = Flange st. steel 1.4404, PN 10	1H = DN 100 / 4"		5 = Tantalum	6 = Titanium		1 = 48 V _{AC}	1 = Pipe duct monitoring	B = from the bottom to the top, display on the right
MID-2L = ANSI-Flange steel, 150 lbs	1Z = DN 125 / 5"		7 = Platinum			2 = 24 V _{AC}		
MID-2M = ANSI-Flange steel, 300 lbs	1F = DN 150 / 6"					3 = 24 V _{DC}		
MID-2R = ANSI-Flange st. steel 1.4404, 150 lbs	2H = DN 200 / 8"							
MID-2S = ANSI-Flansch st. steel 1.4404, 300 lbs	2F = DN 250 / 10"							
	3H = DN 300 / 12"							
	3F = DN 350 / 14"							
	4H = DN 400 / 16"							
	4F = DN 450							
	5H = DN 500 / 20"							
	6H = DN 600 / 24"							
	7H = DN 700 / 28"							
	8H = DN 800 / 32"							
	9H = DN 900 / 36"							
	1T = DN 1000 / 40"							


* The combination connection type $\leftarrow \rightarrow$ Nominal diameter is described in the table "pressure rating".

No responsibility taken for errors;
subject to change without prior notice

Accessories earthing washers

Order information (ordering example: **MID-ZEA 10 01**)

Type / type of connection MID	Nominal diameter	Earthing washers material / washers thickness
MID-ZEA = for DIN-flange connection	10 = nominal diameter DN 10 15 = nominal diameter DN 15 20 = nominal diameter DN 20 25 = nominal diameter DN 25 32 = nominal diameter DN 32 40 = nominal diameter DN 40 50 = nominal diameter DN 50 65 = nominal diameter DN 65 80 = nominal diameter DN 80 1H = nominal diameter DN 100 1Z = nominal diameter DN 125 1F = nominal diameter DN 150 2H = nominal diameter DN 200 2F = nominal diameter DN 250 3H = nominal diameter DN 300 3F = nominal diameter DN 350 4H = nominal diameter DN 400 4F = nominal diameter DN 450 5H = nominal diameter DN 500 6H = nominal diameter DN 600 7H = nominal diameter DN 700 8H = nominal diameter DN 800 9H = nominal diameter DN 900 1T = nominal diameter DN 1000	01 = stainless steel DIN 1.4571 (316Ti) Thickness: 3 mm
MID-ZEL = for ANSI-flange connection		00 = Hastelloy C4 / 3 mm
		05 = Tantalum / 0.5 mm
		06 = Titanium / 3 mm

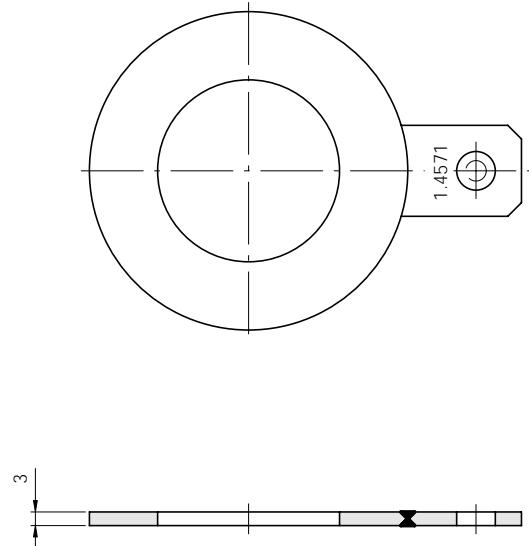

Please note: two earthing washers are required for connecting the KOBOLD-MID to non conductive pipes.

Dimensions and weights

Nominal diameter DN [mm]	PN [bar]	Dimensions in mm			Weight** [kg]
		L*	H	W	
10	40	150	165	121	5.0
15	40	150	165	121	5.0
20	40	150	165	121	7.0
25	40	150	141	115	7.0
32	40	150	157	140	8.0
40	40	150	166	150	8.0
50	40	200	185	165	8.0
65	16	200	199	185	10.0
80	40	200	209	200	12.0
100	16	250	237	220	15.0
125	16	250	266	250	19.0
150	16	300	299	285	22.0
200	10	350	357	340	34.0
250	10	400	405	395	48.0
300	10	500	455	445	58.0
350	10	500	507	505	78.0
400	10	600	563	565	98.0
450	10	600	613	615	on request
500	10	600	667	670	128.0
600	10	600	777	780	164.0
700	10	700	893	895	245.0
800	10	800	1009	1015	328.0
900	10	900	1111	1115	425.0
1000	10	1000	1221	1230	507.0

* Total fitting length for measuring sensor + 2 optional earthing washers + 2 seals.


Dimension L + 2 x 3 mm + 2 x seal thickness.

** Weight of the sensor with DIN flanges.


All flanges are acc. to EN 1092-1

Dimensions and weights


MID compact version

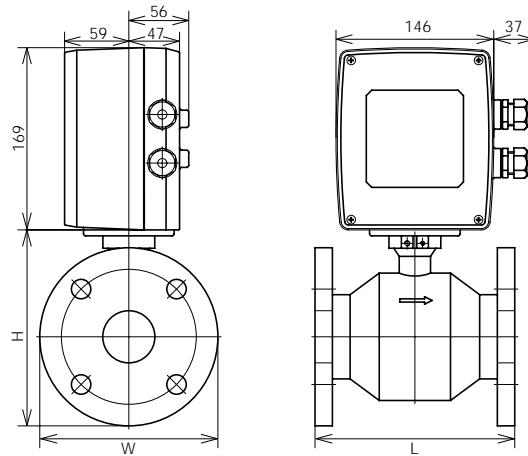

MID separate sensor version

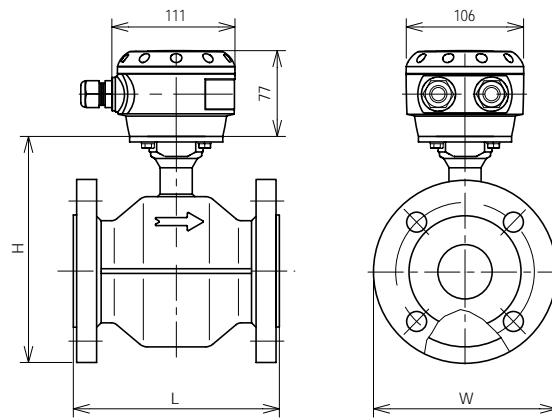

Wall mount electronics enclosure

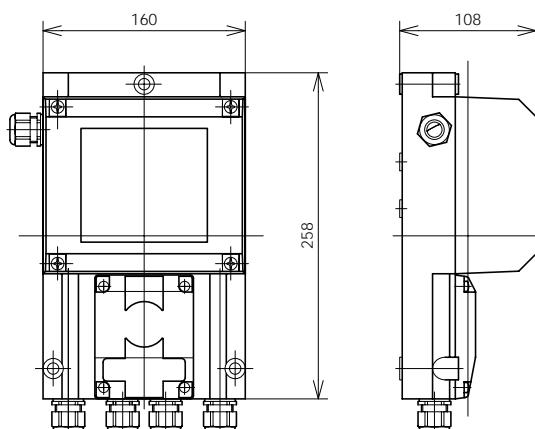



Dimensions and weights

Nominal diameter		Flange dimensions with 150 lbs in inches			Weight***
ANSI	[psig]*	L**	H	W	[lbs]
3/8"	284	5.12	8.23	3.50	13.2
1/2"	284	5.12	8.23	3.50	13.2
1"	284	5.91	5.39	4.25	17.6
1 1/2"	284	5.91	6.10	5.00	19.8
2"	284	7.87	7.05	6.00	17.6
3"	284	7.87	8.03	7.50	29.0
4"	284	9.84	9.49	9.00	40.0
5"	284	9.84	10.55	10.00	x
6"	284	11.81	11.69	11.00	58.0
8"	284	13.78	14.29	11.00	95.0
10"	284	15.75	16.77	13.50	140.0
12"	284	19.69	20.08	16.00	210.0
14"	284	27.56	20.71	19.00	285.0
16"	284	31.50	23.07	21.00	365.0
20"	284	31.50	27.09	23.50	492.0
24"	284	31.50	31.50	32.00	675.0
28"	145	35.43	35.98	36.50	x
32"	145	39.37	40.75	41.73	x
36"	145	43.31	44.96	46.00	x
40"	145	47.24	49.41	50.75	x
48"	145	55.12	57.87	59.50	x
72"	145	78.74	82.80	86.50	x
80"	145	86.61	95.39	99.75	x

Flange dimensions with 150 lbs in mm			Weight***
L**	H	W	[kg]
130	209	89	6.0
130	209	89	6.0
150	137	108	8.0
150	155	127	9.0
200	179	152	8.0
200	204	191	13.2
250	241	229	18.1
250	268	254	x
300	297	279	26.3
350	363	279	43.1
400	426	343	63.5
500	510	406	95.3
700	526	483	129.3
800	586	533	165.6
800	688	597	223.2
800	800	813	306.2
900	914	927	x
1000	1035	1060	x
1100	1142	1168	x
1200	1255	1289	x
1400	1470	1511	x
2000	2103	2197	x
2200	2423	2534	x

Nominal diameter		Flange dimensions with 300 lbs in inches			Weight***
ANSI	[psig]*	L**	H	W	[lbs]
3/8"	740	5.12	8.23	3.75	x
1/2"	740	5.12	8.23	3.75	x
1"	740	5.91	5.71	4.87	x
1 1/2"	740	7.87	6.65	6.13	x
2"	740	9.84	7.32	6.50	x
3"	740	9.84	8.43	8.25	x
4"	740	11.81	10.00	8.25	x
6"	740	12.60	12.44	12.50	x

Flange dimensions with 300 lbs in mm			Weight***
L**	H	W	[kg]
130	209	95	x
130	209	95	x
150	145	124	x
200	169	156	x
250	186	165	x
250	214	210	x
300	254	210	x
320	316	317	x

* at 68°F / 20°C

** Total fitting length when delivered with separate earthing washers:
Length L + 2 x (0.12" or 3 mm) + 2 x seal thickness

*** Approx. weight of the sensor, ANSI flanges included.

Flange ANSI 3/8"-24" according to ANSI B 16.5.

Flange ANSI 28" and above according to ANSI B 1647 A.

x = on request