

- p<sub>max.</sub> PN 64
- t<sub>max.</sub> +160 °C
- Connections:  
 Screw thread G 1/4 to G 4  
 Welded connection DN 15 to DN 100  
 Flanges DN 15 to DN 200
- Pilot pressure: 6 to 8 bar
- Double-acting or spring return
- Brass, stainless steel, GG-25
- 2- and 3-way version
- T and L bore  
 (with 3-way ball valve)



KOBOLD companies worldwide:

ARGENTINA, AUSTRIA, BELGIUM, CANADA, CHILE, CHINA, CZECHIA,  
 FRANCE, GERMANY, GREAT BRITAIN, INDIA, INDONESIA, ITALY,  
 MALAYSIA, MEXICO, NETHERLANDS, POLAND, SINGAPORE, SLOVAKIA,  
 SPAIN, SWITZERLAND, THAILAND, USA, VENEZUELA, VIETNAM

KOBOLD Messring GmbH  
 Nordring 22-24  
 D-65719 Hofheim/Ts.  
 ☎ +49(0)6192 299-0  
 Fax +49(0)6192 23398  
 E-Mail: info.de@kobold.com  
 Internet: www.kobold.com

Models:  
 KUP-  
 KA, ZA, VH,  
 VN, PD, VO,  
 VK

### Description

The actuator is a double-piston actuator, specially designed for operating ball valves and flaps. Two versions are available: double-acting and spring return (single-acting). The double piston design allows high torque with small external dimensions. You can adjust the angular stroke by  $\pm 6^\circ$  with the standard end position.

### Design

The force from the reciprocating pistons is transmitted to a pinion by two racks attached to the pistons. This arrangement delivers a linear torque characteristic across the full stroke.

### Principle of operation double-acting

The space between both pistons is pressurized through point 'A' – forcing the pistons apart. The force of both pistons is transmitted through the racks to the pinion 'C'. When pressure is applied at connection 'B', and 'A' is vented, both external chambers are pressurized and the pistons are forced together. You can set the angular stroke by undoing lock nuts 'E' and adjusting the final stroke position setting screws 'D'.

### Principle of operation single-acting



The space between both pistons is pressurized through point 'A' – forcing the pistons apart and forcing the springs together. The force of both pistons is transmitted through the racks to the pinion 'C'. If no pressure is applied at connection 'B', and 'A' is vented, the pistons are forced to their home positions by the spring resistance. You can set the angular stroke by undoing lock nuts 'E' and adjusting the final stroke position setting screws 'D'.

### Technical Details

Design:	double-piston rotary actuator, maintenance-free, pneumatic double acting or single-acting with spring return
Mounting:	Four or eight DIN ISO 5211 female threads on the bottom, pinion as per DIN 3337, interface for solenoid valves and signal transmitter as per NAMUR
<b>Materials</b>	
Body:	aluminium alloy (anodized)
Cap:	plastic, fibre-reinforced or aluminium
Piston:	special plastic, fibre-reinforced or aluminium
Pinion:	stainless steel or steel, zinc-coated
Bearings:	smooth plastic
Gaskets:	NBR
Nuts and bolts:	stainless steel
Pilot media:	filtered air, to PNEUROP/ISO class 4 standard at least
Temperature range:	ambient temperature -20°C to +85°C
Rotation:	90° (adjustable $\pm 6^\circ$ )
Torque moment range:	5 - 300 Nm (depending on size used)
Pilot pressure:	2 - 10 bar
Options:	3/2- or 5/2-way electrical solenoid valve/mechanical limit switch

Actuator, adapter and ball valve are perfectly matched and supplied as a complete unit for faultless operation.

### Pneumatic actuator

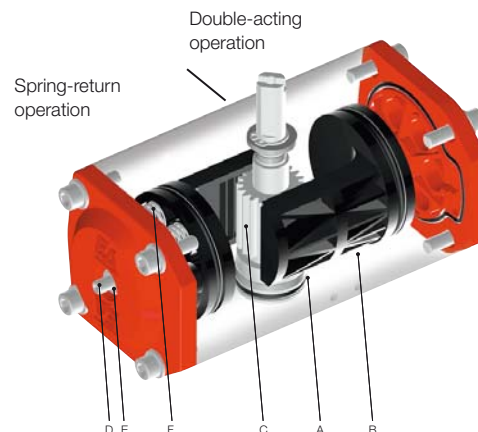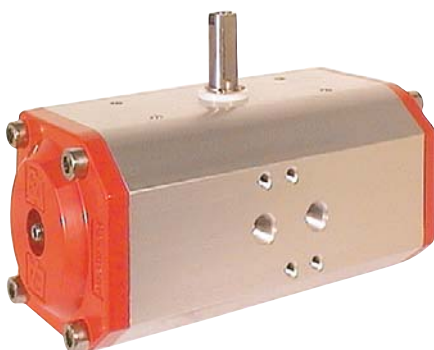

### 3/2-way solenoid valve for single-acting actuators



#### Technical Details


Design: servo assisted slide valve with emergency manual operation, flange as per NAMUR

Control functions: 3/2-way


#### Materials

Body: aluminium (anodized)  
 Internal parts: brass and plastic  
 Gaskets: NBR  
 Voltage rating: 24 V<sub>DC</sub>, 230 V<sub>AC</sub> 50 Hz  
 24 V<sub>DC</sub> EEx m IIT4, 230 V<sub>AC</sub> EEx m IIT4  
 Electr. connection: connector as per DIN 43650  
 Power consumption: DC voltage 4.2 W  
 A.C. voltage: 7.0/4.0 VA  
 Duty cycle: 100 %  
 Pilot media: filtered air  
 Pressure range: 1.5 to 10 bar  
 Temperature range: -20 °C to +70 °C


#### Dimensions

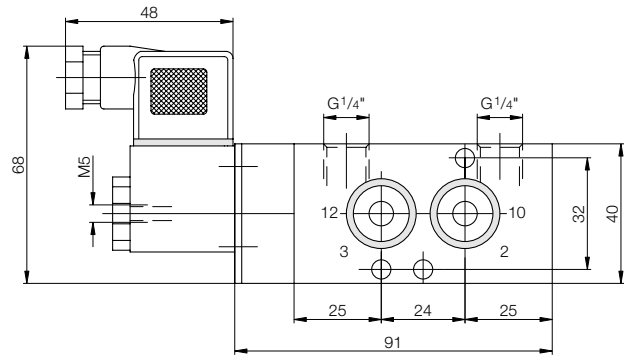

#### Diagram

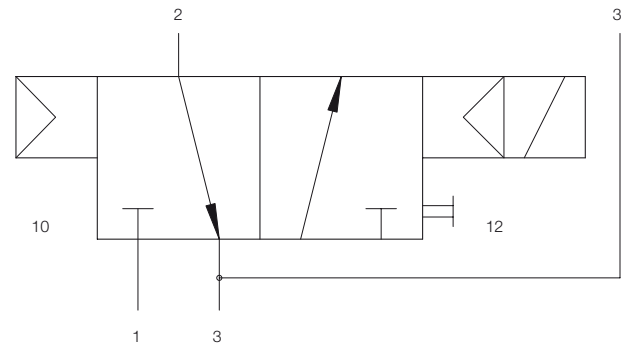

### 5/2-way solenoid valve for double acting actuators



#### Technical Details


Design: servo assisted slide valve with emergency manual operation, flange as per NAMUR

Control functions: 5/2-way


#### Materials

Body: aluminium (anodized)  
 Internal parts: brass and plastic  
 Gaskets: NBR  
 Voltage rating: 24 V<sub>DC</sub>, 230 V<sub>AC</sub> 50 Hz  
 24 V<sub>DC</sub> EEx m IIT4, 230 V<sub>AC</sub> EEx m IIT4  
 Electr. connection: connector as per DIN 43650  
 Power consumption: DC voltage 4.2 W  
 A.C. voltage: 7.0/4.0 VA  
 Duty cycle: 100 %  
 Pilot media: filtered air  
 Pressure range: 1.5 to 10 bar  
 Temperature range: -20 °C to +70 °C

#### Dimensions

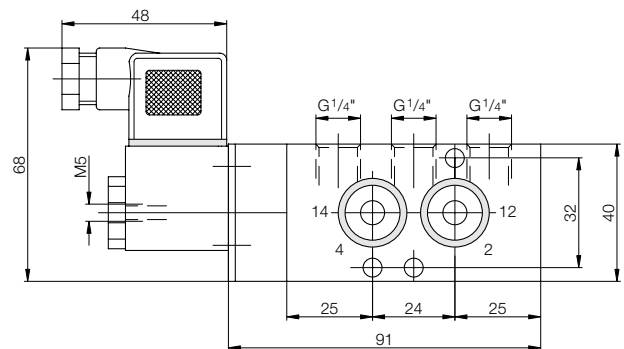

#### Diagram

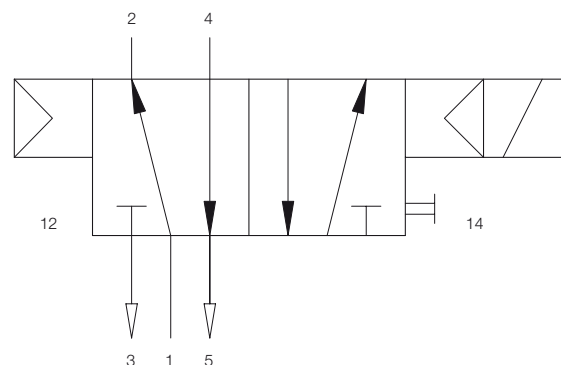


**Electric-mechanic limit switches in a protective casing**


**IP 65**




**Wiring diagram for IP 65**



**EEx**



**Wiring diagram for EEx**



**Technical Details**

Design: 2 electromechanical microswitches in a protective casing

Protection type: IP 65 as per DIN 40050  
EEx d IIC T6 to EN 50014

**Materials**

Housing: Vestamide, black  
Cover: Macrolon, transparent (IP 65)  
Vestamide, black (EEx)

Voltage rating: max. 250 V


Electrical connection: cable gland, conduit thread 13.5

Contact rating: max. 16 A (IP 65)  
max. 6 A (EEx)

Switching function: two N/O / N/C contacts

Temperature: -20°C to +100°C (IP 65)  
-20°C to +85°C (EEx)

**Dimensions**

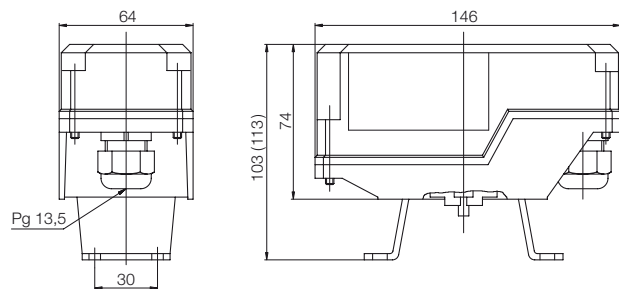



**Design**

Two-piece threaded joint body design with full cylindrical bore and mounting pad for actuator mounting. With stamping as per ISO 5200 instructions A4.

Operation: pneumatic single- or double-acting  
 Pilot pressure: 6 to 8 bar  
 Pilot media: filtered air  
 Mounting position: any  
 Options: 3/2- or 5/2-way solenoid valve  
 electric/mechanic limit switches



**Technical Details flow fitting**

Connections: female thread Rp 1/2 to Rp 4 (as per DIN 2999)  
 Temperature range: -30°C to +120°C  
 Nominal pressure: PN 16

**Materials**

Body: brass, nickel-plated  
 Ball: brass, hard-chrome plated  
 Ball gaskets: PTFE/FKM  
 Spindle gasket: FKM

**KUP-KA**

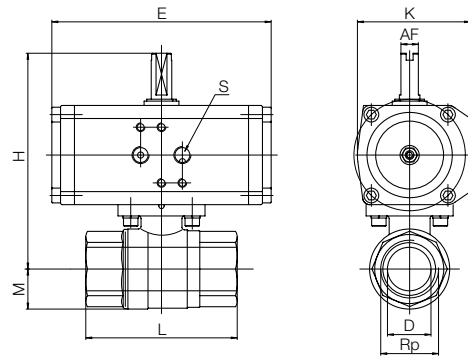

**Dimensions**

1 = double-acting actuator; 2 = single-acting actuator; \* = weight without springs

Screw thread [Rp]	D [mm]	L [mm]	H <sup>1</sup> [mm]	H <sup>2</sup> [mm]	M [mm]	E <sup>1</sup> [mm]	E <sup>2</sup> [mm]	K <sup>1</sup> [mm]	K <sup>2</sup> [mm]	S [G]	AF <sup>1</sup> [mm]	AF <sup>2</sup> [mm]	Weight <sup>1*</sup> [kg]	Weight <sup>2*</sup> [kg]
1/2	15	65	116	116	16	126	126	65	65	1/8	10	10	1.2	1.2
3/4	20	75	121	121	19	126	126	65	65	1/8	10	10	1.3	1.3
1	24	86	124	138	23	126	163	65	78	1/8	10	10	1.6	2.1
1 1/4	30	95	129	143	28	126	163	65	78	1/8	10	10	1.8	2.4
1 1/2	38	100	157	171	35	163	193	78	86	1/8	10	10	2.5	4.2
2	47	120	164	178	42	163	193	78	86	1/8	10	10	3.4	5.1
2 1/2	64	195	197	212	57	193	231	100	115	1/4	10	10	6.4	7.6
3	76	188	207	222	68	193	231	100	115	1/4	10	10	9.3	10.5
4	95	225	242	270	78	231	260	115	143	1/4	10	19	-	-

**Order Details** (example: KUP-KA R15 C A 0)

Order no.	Connection size	Actuation	Solenoid valve	Limit switch
KUP-KA	R15 = Rp 1/2 R20 = Rp 3/4 R25 = Rp 1 R32 = Rp 1 1/4 R40 = Rp 1 1/2 R50 = Rp 2 R65 = Rp 2 1/2 R80 = Rp 3 R1H = Rp 4	C = single-acting, default CLOSED O = single-acting, default OPEN  D = double-acting	A = without	0 = without 2 = 2 limit switches
			B = 3/2-way (24 V <sub>DC</sub> ) C = 3/2-way (230 V <sub>AC</sub> )	
			F = 5/2-way (24 V <sub>DC</sub> ) G = 5/2-way (230 V <sub>AC</sub> )	



**Design**

Three-piece threaded joint body design with full cylindrical bore.

- Operation: pneumatic single- or double-acting
- Pilot pressure: 6 to 8 bar
- Pilot media: filtered air
- Mounting position: any
- Options: 3/2- or 5/2-way solenoid valve  
electric/mechanic limit switches



**Technical Details flow fitting**

- Connections: female thread G 1/2 to G 4  
welded connection DN 15 - DN 100
- Temperature range: -30°C to +110°C
- Nominal pressure: PN 16

**Materials**

- Body: stainless steel 1.4408
- Ball: stainless steel 1.4408
- Ball gaskets: PTFE glass-fibre-reinforced
- Spindle gasket: PTFE/FKM

**KUP-ZA**

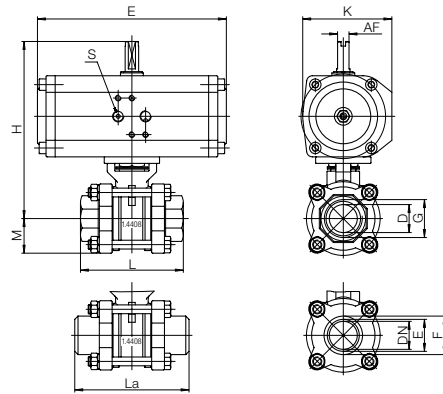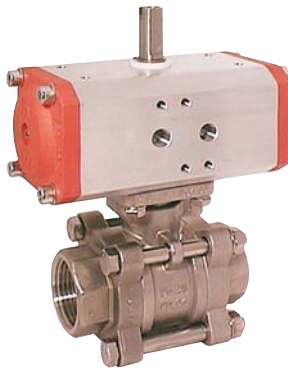

**Dimensions**

1 = double-acting actuator; 2 = single-acting actuator; \* = weight without springs

Screw thread [G]	DN [mm]	Ø D [mm]	L [mm]	Ø E [mm]	Ø F [mm]	La [mm]	H <sup>1</sup> [mm]	H <sup>2</sup> [mm]	M [mm]	E <sup>1</sup> [mm]	E <sup>2</sup> [mm]	K <sup>1</sup> [mm]	K <sup>2</sup> [mm]	S [G]	AF <sup>1</sup> [mm]	AF <sup>2</sup> [mm]	Weight <sup>1*</sup> [kg]	Weight <sup>2*</sup> [kg]
1/2	15	15	75	18	21.3	75	134	148	22.5	126	163	65	78	1/8	10	10	1.5	2.0
3/4	20	20	80	26	26.9	90	139	153	27.0	126	163	65	78	1/8	10	10	1.8	2.3
1	25	25	90	28	33.7	100	161	175	30.0	163	197	78	86	1/8	10	10	2.5	3.0
1 1/4	32	32	110	36	42.0	110	166	180	36.5	163	197	78	86	1/8	10	10	3.5	3.5
1 1/2	40	40	120	43	48.3	125	193	205	40.5	197	193	86	100	1/8	10	10	4.5	6.2
2	50	50	140	54	60.3	150	200	227	50.0	197	231	86	115	1/8	10	10	7.7	8.9
2 1/2	65	65	185	70	76.1	190	230	273	72.5	193	266	100	143	1/4	10	19	12.9	-
3	80	80	205	82	88.9	220	256	284	89.0	231	266	115	143	1/4	10	19	19.1	-
4	100	100	240	106	114.3	270	307	-	102.0	266	-	143	-	1/4	19	-	27.4	-

**Order Details** (example: KUP-ZA R15 C A 0)

Order no.	Connection size	Actuation	Solenoid valve	Limit switch
KUP-ZA	Female thread	C = single-acting, default CLOSED O = single-acting, default OPEN	A = without B = 3/2-way (24 V <sub>DC</sub> ) C = 3/2-way (230 V <sub>AC</sub> ) D = 3/2-way (24 V <sub>DC</sub> EEx m II T4) E = 3/2-way (230 V <sub>AC</sub> EEx m II T4)	0 = without 2 = 2 limit switches 3 = 2 limit switches EEx d II C T6
	Welded connection		F = 5/2-way (24 V <sub>DC</sub> ) G = 5/2-way (230 V <sub>AC</sub> ) H = 5/2-way (24 V <sub>DC</sub> EEx m II T4) K = 5/2-way (230 V <sub>AC</sub> EEx m II T4)	



**Design**

Two-piece threaded joint body design with full cylindrical bore.

- Operation: pneumatic single- or double-acting
- Pilot pressure: 6 to 8 bar
- Pilot media: filtered air
- Mounting position: any
- Options: 3/2- or 5/2-way solenoid valve  
electric/mechanic limit switches


**Technical Details flow fitting**

- Connections: female thread G 1/2 to G 2
- Temperature range: -20°C to +110°C
- Nominal pressure: PN 16

**Materials**

- Body: stainless steel 1.4408
- Ball: stainless steel 1.4401
- Ball gaskets: PTFE
- Spindle gasket: PTFE/FKM

**KUP-VH**

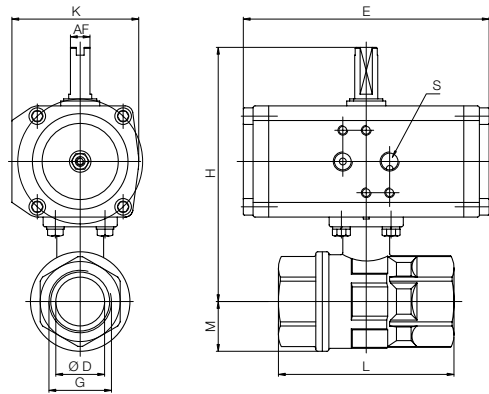

**Dimensions**

Screw thread [G]	Ø D [mm]	L [mm]	H <sup>1</sup> [mm]	H <sup>2</sup> [mm]	M [mm]	E <sup>1</sup> [mm]	E <sup>2</sup> [mm]	K <sup>1</sup> [mm]	K <sup>2</sup> [mm]	S [G]	AF [mm]	Weight <sup>1*</sup> [kg]	Weight <sup>2*</sup> [kg]
1/2	15	67	118	132	17	126	163	65	78	1/8	10	1.2	1.7
3/4	20	78	120	134	21	126	163	65	78	1/8	10	1.4	2.0
1	24	90	130	144	26	126	163	65	78	1/8	10	1.9	2.4
1 1/4	32	100	134	162	32	126	197	65	86	1/8	10	2.2	2.8
1 1/2	40	112	162	188	39	163	193	78	100	1/8	10	3.6	5.2
2	50	135	171	197	49	163	193	78	100	1/8	10	4.8	6.5

1 = double-acting actuator; 2 = single-acting actuator; \* = weight without springs

**Order Details** (example: KUP-VH R15 C A 0)

Order no.	Connection size	Actuation	Solenoid valve	Limit switch
KUP-VH	R15 = G 1/2 R20 = G 3/4 R25 = G 1 R32 = G 1 1/4 R40 = G 1 1/2 R50 = G 2	C = single-acting, default CLOSED O = single-acting, default OPEN  D = double-acting	A = without	0 = without 2 = 2 limit switches
			B = 3/2-way (24 V <sub>DC</sub> ) C = 3/2-way (230 V <sub>AC</sub> )  F = 5/2-way (24 V <sub>DC</sub> ) G = 5/2-way (230 V <sub>AC</sub> )	



**Design**

Four-piece threaded joint body design, with mounting pad for actuator mounting, full cylindrical bore, T or L bore, universal sealing. Does not prevent crossover flow.

- Operation: pneumatic single- or double-acting
- Position: specify with order! (see table)
- Pilot pressure: 6 to 8 bar
- Pilot media: filtered air
- Mounting position: any
- Options: 3/2- or 5/2-way solenoid valve  
electric/mechanic limit switches


**Technical Details flow fitting**

- Connections: female thread G 1/2 to G 2
- Temperature range: -20°C to +150°C
- Nominal pressure: PN 16 (up to G 1)  
PN 10 (from G 1 1/4)

**Materials**

- Body: brass, nickel-plated
- Ball: brass, hart chrome-plated
- Ball gaskets: PTFE
- Spindle gasket: PTFE/FKM

**KUP-VN**

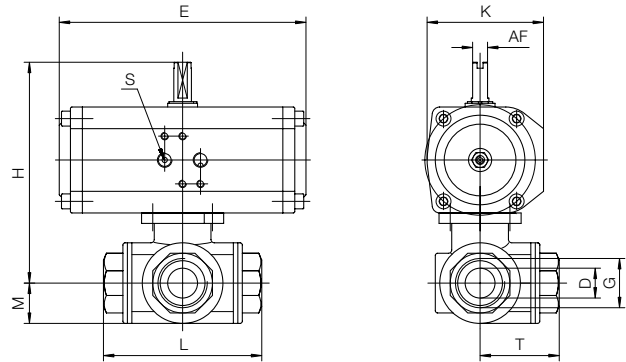

**Dimensions**

Screw thread [G]	Ø D [mm]	L [mm]	H <sup>1</sup> [mm]	H <sup>2</sup> [mm]	M [mm]	E <sup>1</sup> [mm]	E <sup>2</sup> [mm]	K <sup>1</sup> [mm]	K <sup>2</sup> [mm]	S <sup>1</sup> [G]	S <sup>2</sup> [G]	T [mm]	AF [mm]	Weight <sup>1*</sup> [kg]	Weight <sup>2*</sup> [kg]
1/4	8	67.0	135	135	17.0	126	126	65	65	1/8	1/8	33.5	10	1.5	1.5
3/8	10	77.0	135	135	17.0	126	126	65	65	1/8	1/8	33.5	10	1.5	1.5
1/2	15	77.0	139	153	20.0	126	163	65	78	1/8	1/8	38.5	10	1.6	2.1
3/4	20	87.0	152	166	24.0	126	163	64	78	1/8	1/8	43.5	10	1.9	2.4
1	25	105.0	179	193	30.0	163	197	78	86	1/8	1/8	52.5	10	3.1	3.1
1 1/4	32	122.5	192	206	36.0	163	197	78	86	1/8	1/8	61.3	10	4.1	5.8
1 1/2	40	138.5	221	233	43.0	197	193	86	100	1/8	1/4	69.3	10	7.6	7.6
2	50	166.0	240	267	55.5	197	231	86	115	1/8	1/4	83.0	10	11.4	12.6

1 = double-acting actuator; 2 = single-acting actuator; \* = weight without springs

**Order Details** (example: KUP-VN T 1 R08 C A 0)

Order no.	3-way version	Position*	Connection size	Actuation	Solenoid valve	Limit switch
KUP-VN	T = T-bore	1 = standard	R08 = G 1/4	C = single-acting, default CLOSED O = single-acting, default OPEN	A = without	0 = without 2 = 2 limit switches
		2	R10 = G 3/8		B = 3/2-way (24 V <sub>DC</sub> )	
3	R15 = G 1/2	C = 3/2-way (230 V <sub>AC</sub> )				
4	R20 = G 3/4					
	L = L-bore	5 = standard	R25 = G 1	D = double-acting	F = 5/2-way (24 V <sub>DC</sub> )	
6		R32 = G 1 1/4	G = 5/2-way (230 V <sub>AC</sub> )			
		7	R40 = G 1 1/2			
			R50 = G 2			

\*see also KUG-VN, page 9





**Design**

Four-piece threaded joint body design with mounting pad for actuator mounting, reduced cylindrical bore, T or L bore, uni-versal sealing. Does not prevent crossover flow.

- Operation: pneumatic single- or double-acting
- Position: specify with order! (see table)
- Pilot pressure: 6 to 8 bar
- Pilot media: filtered air
- Mounting position: any
- Options: 3/2- or 5/2-way solenoid valve  
electric/mechanic limit switches


**Technical Details flow fitting**

- Connections: female thread G 1/2 to G 2
- Temperature range: -30°C to +110°C
- Nominal pressure: PN 16

**Materials**

- Body: stainless steel 1.4408
- Ball: stainless steel 1.4408
- Ball gaskets: PTFE
- Spindle gasket: PTFE/FKM

**KUP-PD**

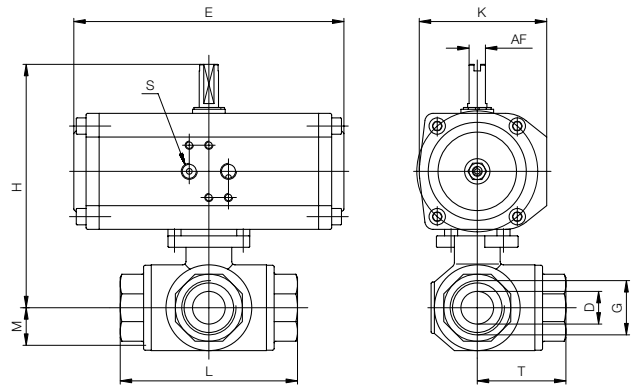

**Dimensions**

Screw thread [G]	Ø D [mm]	L [mm]	H <sup>1</sup> [mm]	H <sup>2</sup> [mm]	M [mm]	E <sup>1</sup> [mm]	E <sup>2</sup> [mm]	K <sup>1</sup> [mm]	K <sup>2</sup> [mm]	S <sup>1</sup> [G]	S <sup>2</sup> [G]	T [mm]	AF [mm]	Weight <sup>1*</sup> [kg]	Weight <sup>2*</sup> [kg]
1/2	11	79	136	150	18,0	126	163	65	78	1/8	1/8	40.0	10	1.6	2.2
3/4	16	88	150	164	22,5	126	163	65	78	1/8	1/8	44.0	10	2.0	2.6
1	20	108	171	185	26,0	163	197	78	86	1/8	1/8	55.0	10	3.1	4.1
1 1/4	25	124	203	215	33,5	197	193	86	100	1/8	1/4	61.0	10	4.8	5.8
1 1/2	32	134	225	240	37,5	193	231	100	115	1/4	1/4	67.0	10	6.9	8.4
2	40	164	259	287	48,0	231	266	115	143	1/4	1/4	84.0	10	13.5	13.5

1 = double-acting actuator; 2 = single-acting actuator; \* = weight without springs

**Order Details** (example: KUP-PD T 1 R15 C A 0)

Order no.	3-way version	Position*	Connection size	Actuation	Solenoid valve	Limit switch
KUP-PD	T = T-bore	1 = standard	R15 = G 1/2 R20 = G 3/4 R25 = G 1 R32 = G 1 1/4	C = single-acting, default CLOSED O = single-acting, default OPEN	A = without	0 = without 2 = 2 limit switches
		2			B = 3/2-way (24 V <sub>DC</sub> ) C = 3/2-way (230 V <sub>AC</sub> )	
KUP-PD	L = L-bore	3	R40 = G 1 1/2 R50 = G 2	D = double-acting	F = 5/2-way (24 V <sub>DC</sub> ) G = 5/2-way (230 V <sub>AC</sub> )	
		4				
		5 = standard				
		6				
		7				

\*see also KUG-PD, page 16

No responsibility taken for errors; subject to change without prior notice.



**Design**

Multipart body design with full cylindrical bore (DN 25 to DN 125: single-part version; DN 150 to DN 200: two-part version), with mounting pad for actuator as per ISO 5211.

Operation: pneumatic single- or double-acting  
 Pilot pressure: 6 to 8 bar  
 Pilot media: filtered air  
 Mounting position: any  
 Options: 3/2- or 5/2-way solenoid valve  
 electric/mechanic limit switches


**Technical Details flow fitting**

Connections: flanges as per DIN 2533  
 DN 25 to DN 200  
 overall length as per DIN 3202-F4/5  
 Temperature range: -20°C to +160°  
 Nominal pressure: PN 16 dimensioned,  
 with threaded holes

**Materials**

Body: cast iron GG-25  
 Ball: brass, hard-chrome plated  
 Ball gaskets: PTFE  
 Spindle gasket: PTFE/FKM

**KUP-VO**

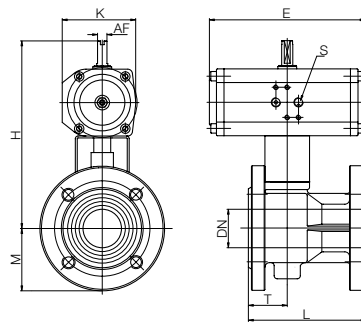

**Dimensions**

1 = double-acting actuator; 2 = single-acting actuator; \* = weight without springs

Flange [DN]	L [mm]	H <sup>1</sup> [mm]	H <sup>2</sup> [mm]	M [mm]	E <sup>1</sup> [mm]	E <sup>2</sup> [mm]	K <sup>1</sup> [mm]	K <sup>2</sup> [mm]	S <sup>1</sup> [mm]	S <sup>2</sup> [G]	T [mm]	AF <sup>1</sup> [mm]	AF <sup>2</sup> [mm]	Weight <sup>1*</sup> [kg]	Weight <sup>2*</sup> [kg]
25	125	166	194	58.0	126	197	65	86	1/8	1/8	42	10	10	4.2	4.7
32	130	187	201	70.0	163	197	78	86	1/8	1/4	47	10	10	6.4	8.1
40	140	216	242	75.0	163	193	78	100	1/8	1/4	49	10	10	7.7	9.4
50	150	236	251	83.0	197	193	86	100	1/8	1/4	52	10	10	9.9	12.3
65	170	262	277	93.0	193	231	100	115	1/4	1/4	65	10	10	14.5	15.3
80	180	288	316	100.0	231	266	115	143	1/4	1/4	66	10	19	18.2	20.4
100	190	335	355	110.0	266	300	143	137	1/4	1/4	89	19	20	26.2	28.6
125	200	357	377	125.0	266	300	143	137	1/4	1/4	100	19	20	39.1	40.9
150	210	440	478	142.5	300	380	137	172	1/4	1/4	105	20	28	52.9	60.1
200	400	520	577	170.0	380	478	172	224	1/4	1/4	200	28	32	113.1	128.2

**Order Details** (example: KUP-VO F25 C A 0)

Order no.	Connection size	Actuation	Solenoid valve	Limit switch
KUP-VO	F25 = DN 25 F32 = DN 32 F40 = DN 40 F50 = DN 50 F65 = DN 65 F80 = DN 80 F1H = DN 100 F1Z = DN 125 F1F = DN 150 F2H = DN 200	C = single-acting, CLOSED O = single-acting, OPEN	A = without B = 3/2-way (24 V <sub>DC</sub> ) C = 3/2-way (230 V <sub>AC</sub> )	0 = without 2 = 2 limit switches
		D = double-acting	F = 5/2-way (24 V <sub>DC</sub> ) G = 5/2-way (230 V <sub>AC</sub> )	



**Design**

Single-part body design with full cylindrical bore, with mounting pad for actuator as per ISO 5211. Approval to TA-Luft (German Technical Instructions on Air Quality).

- Operation: pneumatic single- or double-acting
- Pilot pressure: 6 to 8 bar
- Pilot media: filtered air
- Mounting position: any
- Options: 3/2- or 5/2-way solenoid valve electric/mechanic limit switches


**Technical Details flow fitting**

- Connections: flanges as per DIN 2533 DN 15 to DN 200
- Temperature range: -20°C to +160°C
- Nominal pressure: PN 16 dimensioned, with threaded holes

**Materials**

- Body: stainless steel 1.4408/01
- Ball: stainless steel 1.4401
- Ball gaskets: PTFE
- Spindle gasket: PTFE/FKM

**KUP-VK**

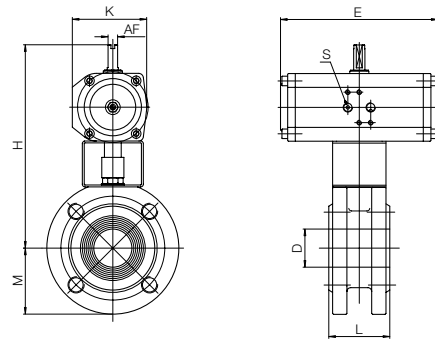

**Dimensions**

Flange [DN]	D [mm]	L [mm]	H <sup>1</sup> [mm]	H <sup>2</sup> [mm]	M [mm]	E <sup>1</sup> [mm]	E <sup>2</sup> [mm]	K <sup>1</sup> [mm]	K <sup>2</sup> [mm]	S <sup>1</sup> [G]	S <sup>2</sup> [G]	AF <sup>1</sup> [mm]	AF <sup>2</sup> [mm]	Weight <sup>1*</sup> [kg]	Weight <sup>2*</sup> [kg]
15	15	35	149	163	45.0	126	163	65	78	1/8	1/8	10	10	2.2	2.4
20	20	40	153	167	50.0	126	163	65	78	1/8	1/8	10	10	2.8	3.3
25	25	46	168	196	55.0	126	197	65	86	1/8	1/8	10	10	3.6	4.1
32	32	54	189	203	64.0	163	197	78	86	1/8	1/8	10	10	5.6	7.3
40	40	63	214	240	75.0	163	193	78	100	1/8	1/4	10	10	5.7	7.4
50	50	82	237	249	82.5	197	193	86	100	1/8	1/4	10	10	8.8	10.0
65	65	103	264	279	92.0	193	231	100	115	1/4	1/4	10	10	8.9	12.2
80	80	122	288	309	100.0	231	266	115	143	1/4	1/4	10	19	17.8	18.3
100	100	153	333	373	110.0	266	300	143	137	1/4	1/4	19	20	25.4	29.5
125	125	196	325	395	127.0	266	300	143	137	1/4	1/4	19	20	42.0	45.7
150	150	232	440	478	152.0	300	380	137	172	1/4	1/4	20	28	57.1	64.3
200	200	317	552	579	200.0	380	478	172	224	1/4	1/4	28	32	94.7	111.3

1 = double-acting actuator; 2 = single-acting actuator; \* = weight without springs

**Order Details** (example: KUP-VK F15 C A 0)

Order no.	Connection size	Actuation	Solenoid valve	Limit switch
KUP-VK	F15 = DN 15 F20 = DN 20 F25 = DN 25 F32 = DN 32 F40 = DN 40 F50 = DN 50 F65 = DN 65 F80 = DN 80 F1H = DN 100 F1Z = DN 125 F1F = DN 150 F2H = DN 200	C = single-acting, default CLOSED O = single-acting, default OPEN	A = without B = 3/2-way (24 V <sub>DC</sub> ) C = 3/2-way (230 V <sub>AC</sub> )	0 = without 2 = 2 limit switches
		D = double-acting	F = 5/2-way (24 V <sub>DC</sub> ) G = 5/2-way (230 V <sub>AC</sub> )	

You will find flow meters / monitors...



... in our brochure S2