



- p<sub>max.</sub> PN 25
- t<sub>max.</sub> +110 °C
- Screw thread:  
G 1/4 to G 4
- Material:  
Brass, stainless steel



KOBOLD companies worldwide:

ARGENTINA, AUSTRIA, BELGIUM, CANADA, CHILE, CHINA, CZECHIA,  
FRANCE, GERMANY, GREAT BRITAIN, INDIA, INDONESIA, ITALY,  
MALAYSIA, MEXICO, NETHERLANDS, POLAND, SINGAPORE, SLOVAKIA,  
SPAIN, SWITZERLAND, THAILAND, USA, VENEZUELA, VIETNAM

KOBOLD Messring GmbH  
Nordring 22-24  
D-65719 Hofheim/Ts.  
☎ +49(0)6192 299-0  
Fax +49(0)6192 23398  
E-Mail: info.de@kobold.com  
Internet: www.kobold.com

Models:  
KUR-TD, MR



**Description**

KOBOLD KUR model series non-return valves are used wherever it must be ensured that transferred liquids do not flow back against the prescribed direction of travel, such as due to pump shut-off, slope of the piping, self-arising vacuum conditions, etc.

**Design**

Two-part screwed body

**Mounting position**

Any, preferably horizontal or vertical; note specified direction of flow.

**Technical Details**

**Connections**

KUR-TD: female thread G 3/8 to G 4

KUR-MR: female thread G 1/4 to G 3

Nominal pressure: PN 10 to PN 25 (see table)

Temperature range: -20 °C to +110 °C

**Materials**

Body: KUR-TD: brass Ms 58


KUR-MR: stainless steel 1.4401

Gasket: KUR-TD: NBR – Delrin


KUR-MR: FKM

Spring: stainless steel 1.4310

**KUR-TD**

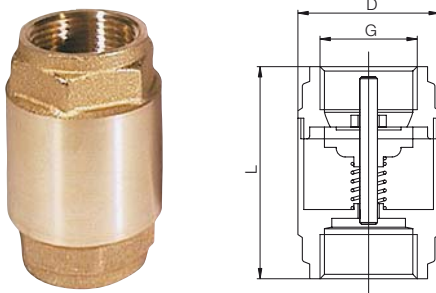

**KUR-MR**

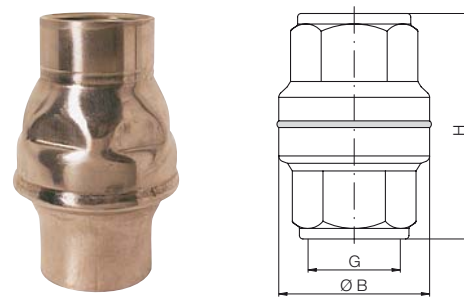

**Dimensions and Order Details**

**KUR-TD brass (example: KUR-TDR 10)**

Screw thread [G]	Order no.	ØD [mm]	L [mm]	Releasing pressure [bar]	Nominal pressure [PN]	Weight [kg]
3/8	KUR-TDR 10	34.5	54	0.025	25	0.2
1/2	KUR-TDR 15	34.5	57	0.025	25	0.2
3/4	KUR-TDR 20	41.5	64	0.025	25	0.3
1	KUR-TDR 25	48.0	75	0.02	25	0.4
1 1/4	KUR-TDR 32	60.5	82	0.03	16	0.6
1 1/2	KUR-TDR 40	71.0	93	0.015	16	0.8
2	KUR-TDR 50	87.0	100	0.015	16	1.2
2 1/2	KUR-TDR 65	120.0	120	0.01	10	3.6
3	KUR-TDR 80	140.0	140	0.01	10	3.8
4	KUR-TDR 1H	172.0	158	on request	10	4.8

**KUR-MR stainless steel (example: KUR-MRR 08)**

Screw thread [G]	Order no.	ØB [mm]	H [mm]	Releasing pressure [bar]	Nominal pressure [PN]	Weight [kg]
1/4	KUR-MRR 08	32	55	0.025	16	0.2
3/8	KUR-MRR 10	32	55	0.025	16	0.2
1/2	KUR-MRR 15	32	55	0.025	16	0.1
3/4	KUR-MRR 20	41	70	0.03	16	0.2
1	KUR-MRR 25	52	79	0.03	16	0.2
1 1/4	KUR-MRR 32	67	96	0.03	16	0.4
1 1/2	KUR-MRR 40	78	100	0.03	16	0.4
2	KUR-MRR 50	85	118	0.03	16	0.7
2 1/2	KUR-MRR 65	107	130	0.03	16	1.2
3	KUR-MRR 80	128	137	0.03	16	1.7